2.Exploded Views and Parts List

2-1 Total Exploded View

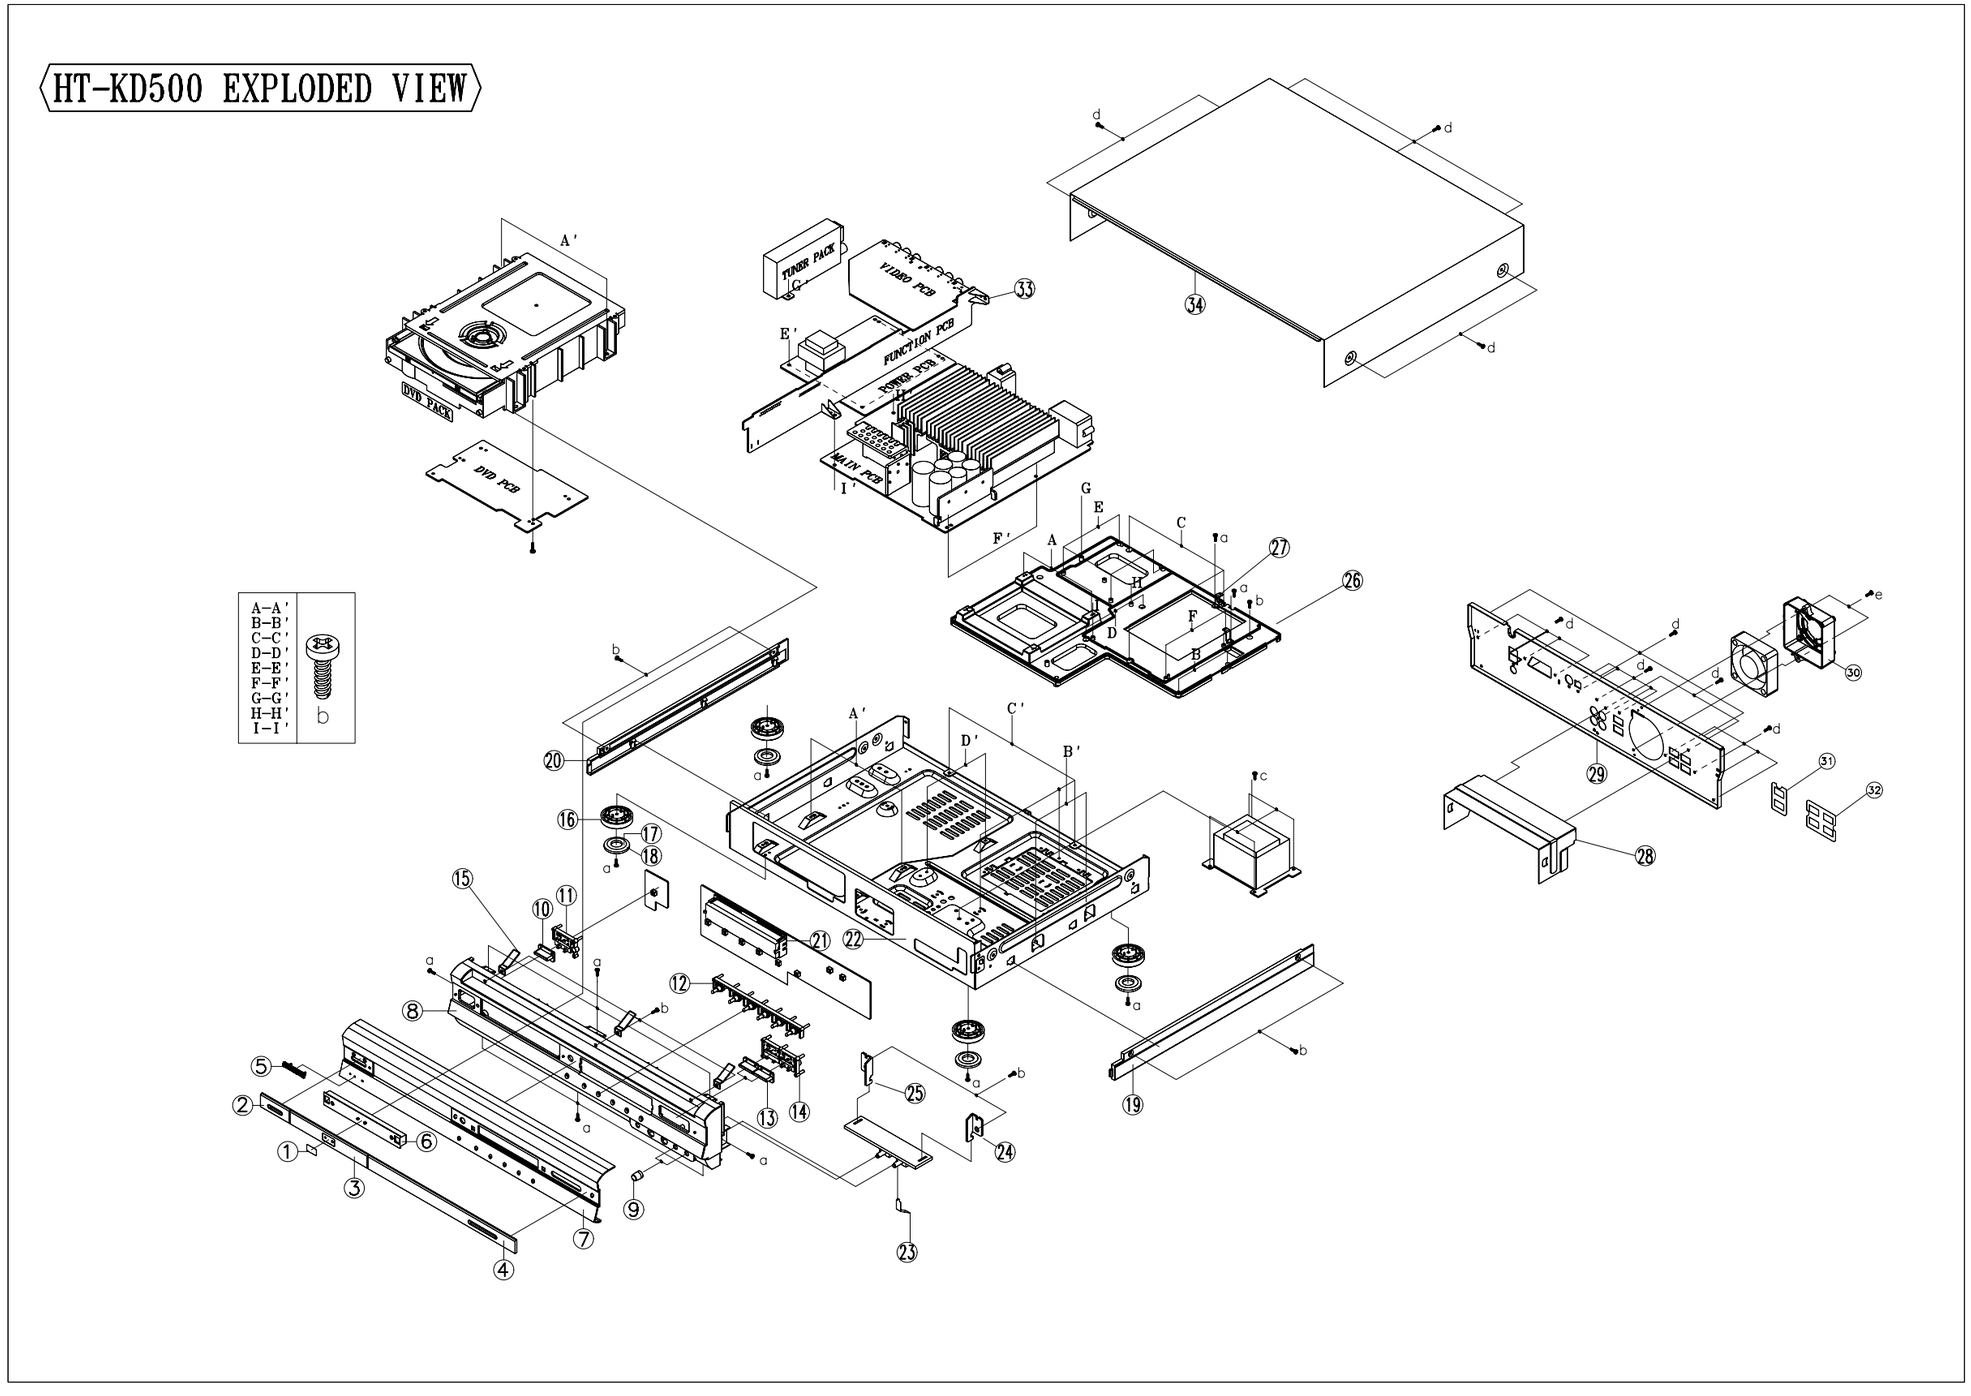

*** Parts List of Total Exploded view**

No.	Code No.	Description	Specification	Q'ty	REMARK
1	AH64-01538C	BADGE-DVD	PE 0.25T	1	
2	AH64-01482C	DECO-POWER	ACRYL 3.0T	1	
3	AH64-01483C	DECO-CD DOOR	ACRYL 3.0T	1	
4	AH64-01484C	DECO-VFD	ACRYL 3.0T	1	
5	AH64-02431A	BADGE-SAMSUNG	AL SILVER	1	
6	AH64-02729B	DOOR TRAY	ABS L/GRAY	1	
7	AH64-01474Z	PANEL-FRONT	AL 1.8T	1	
8	AH64-02728B	CABINET-FRONT	HIPS	1	
9	AH64-02812B	KNOB-MIC	ABS D/GRAY	2	
10	AH67-00130B	LENS POWER	PMMA MILKY	1	
11	AH64-01485A	KNOB-POWER	ABS GRAY	1	
12	AH64-01487B	KNOB-FUNCTION	ABS GRAY / CR	1	
13	AH67-00131B	LENS VOLUME	PMMA MILKY	1	
14	AH64-01486A	KNOB-VOLUME	ABS GRAY	1	
15	AH61-10646E	BRACKET-TOP	PBS 0.3T	3	
16	AH61-00776A	HOLDER-FOOT,F	ABS BLK	4	
17	AH69-00503C	CUSHION-FOOT	RUBBER 2T	4	
18	AH69-00503D	CUSHION-FOOT	RUBBER 2T	4	
19	AH64-01480B	DECO-SIDE.R	MIPS D/GRAY	1	
20	AH64-01479B	DECO-SIDE.L	MIPS D/GRAY	1	
21	AH61-00853A	HOLDER-VFD	ABS BLK	1	
22	AH64-01475A	CABINET-BOTTOM	SECC 1.0T	1	
23	AH61-10646D	BRACKET-VOL-MIC	PBS 0.2T	1	
24	AH61-01503A	BRKT-MIC.L	SECC 1.0T	1	
25	AH61-01504A	BRKT-MIC.R	SECC 1.0T	1	
26	AH64-02730A	CHASSIS-BOTTOM	HIPS	1	
27	AH61-01529A	BRACKET-GROUND	SECC 1.0T	2	
28	AH61-01356A	BRKT-DUCT	SECC 0.6T	1	
29	AH64-02727B	CABINET-REAR	SECC 0.8T	1	
30	AH63-00614B	COVER-FAN	MIPS GRAY L/GRAY	1	
31	AH63-00569A	SHEET SPK.R	PC 0.3T	1	
32	AH63-00569B	SHEET SPK.FCW	PC 0.3T	1	
33	AH61-01140A	BRKT-PCB	SPTE 0.5T	2	
34	AH64-01476B	CABINET-TOP	PCM 0.625T	1	
a	6003-001076	TAPTITE SCREW	BH 3 * 6 BLK	14	
b	6003-000276	TAPTITE SCREW	BH,+,B,M3,L10 YEL	42	
c	6003-001462	TAPTITE SCREW	TH 4* 6 YEL	4	
d	6003-001464	TAPTITE SCREW	BH,+,B,M3,L10 WHT	24	
e	6003-000283	TAPTITE SCREW	BH,+,M3,L8 YEL	2	

2-3 DVD MECHA Exploded View and Parts list

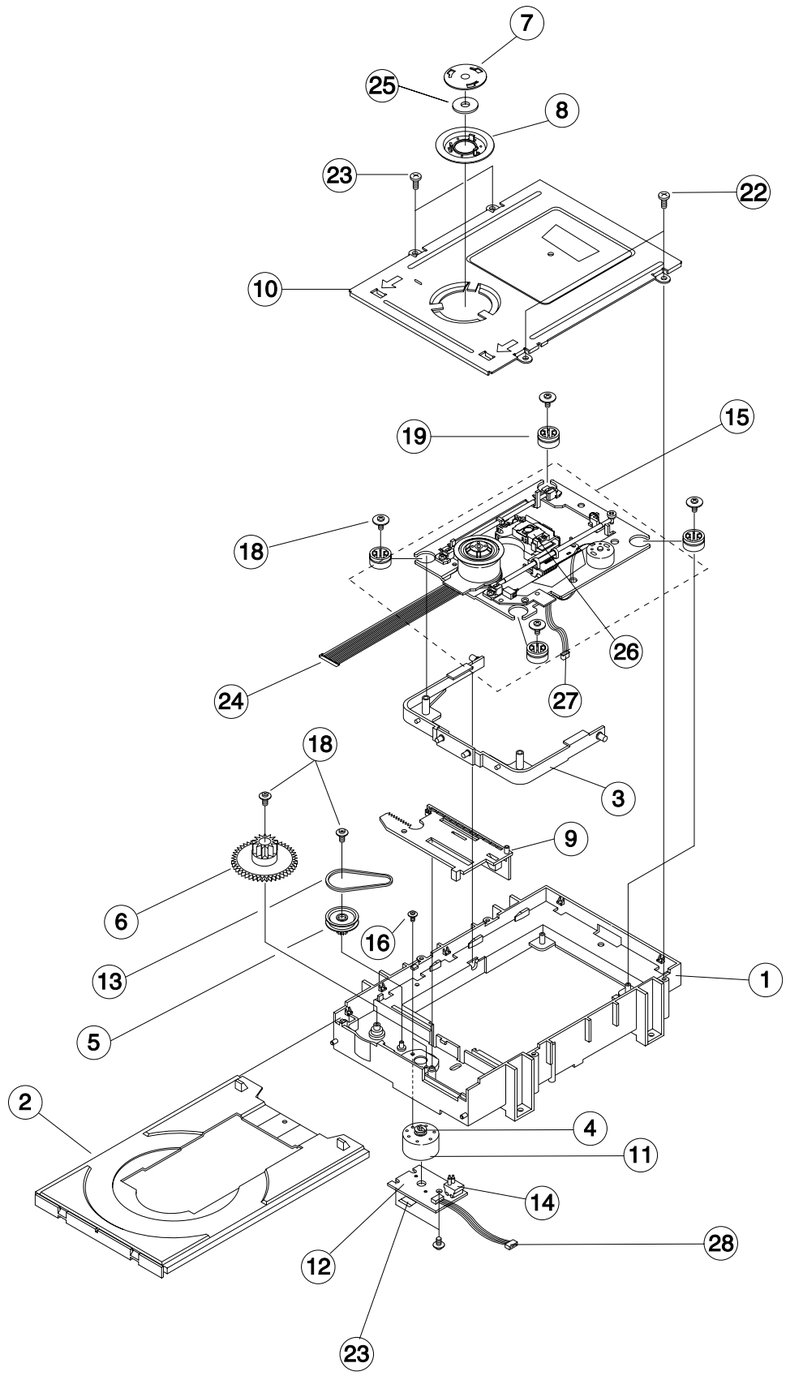

No.	Code No.	Description ;	Specification
	AH59-01153A	**DECK-MECHA ASS'Y**	**CMS-SD100**
1	AH61-01293A	BASE-MAIN	ABS BLK
2	AH63-00535A	TRAY-DISC	ABS D/GRAY
3	AH66-00214A	LEVER-LIFT	ABS+GF20%
4	AH66-00215A	PULLEY-MOTOR	POM WHT
5	AH66-00216A	GEAR-PULLEY	TPE WHT
6	AH66-00217A	GEAR-TRAY	POM WHT
7	AH61-01295A	CLAMPER-BRKT	SECC t0.8
8	AH63-00536A	CLAMPER-MOLD	POM WHT
9	AH66-00218A	SLIDE-CAM	PC WHT
10	AH61-01296A	HOLDER-BRACKET	SECC t0.8
11	AH31-00030B	MOTOR-DC	RF-300E-1D390
12	AH41-00560A	PCB-SWITCH	43.5 * 32.5
13	AH66-00219A	BELT-PULLEY	CR 1.2
14	3409-001119	SWITCH-DETECTOR	JDS2200
15	AH59-01184A	DVD-DECK ASSY	CMS-S51PG4
16	6001-001257	SCREW-MACHINE	1.7*3(W4.5)
17	AJ60-10001A	SCREW-TAP	WASHER 6.8
18	6003-000152	SCREW-TAP	2*10.12
19	AH73-00058A	RUBBER-CD	SILICON 30
20	0205-001106	GREASE	GX-99004
21	0205-001109	GREASE	DM-523
22	6003-000283	SCREW	TAP 3*8
23	AH02-00038A	TAPE	10mm*80mm
24	3809-001451	CABLE-FLAT	60mm 24P
25	3302-001505	MAGNET CHUCK	190 gf
26	AH30-00055A	PICK-UP	4P.JST
27	AH39-00495A	WIRE-HARNESS	UL1007,#28,70mm
28	AH39-00496A	WIRE-HARNESS	UL1007,#28,65mm

**** Caution:** Actually, the whole MECHA do not include DECK ASSY. DECK ASSY should be requested separately at service repair.*